


## GT2000HDR

Ultra-compact short throw Full HD laser home projector



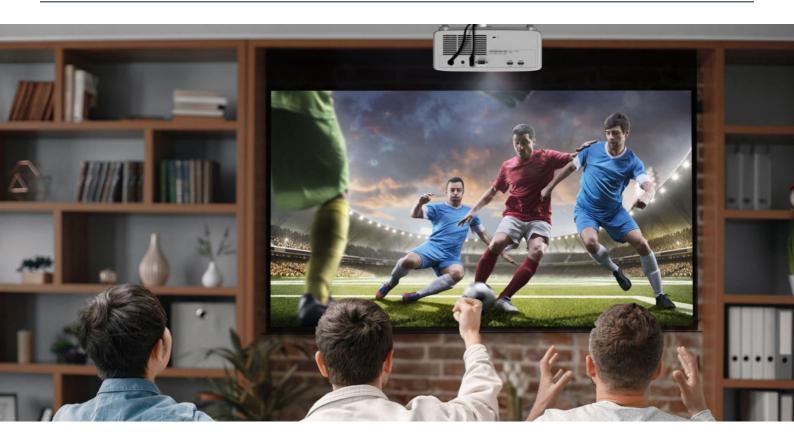

- Bright 3500 lumens for lights on viewing Full HD 1080p laser projector, 4K UHD and HDR compatible
- Eco-friendly design Low power consumption, energy saving and a long product lifespan
- External power supply More reliability, portability and energy efficiency
- Short throw lens 100" image from just over a metre away



Designed with sustainability in mind, the energy-saving GT2000HDR laser projector provides an easy setup in any space around the home, with a short throw lens and extensive connectivity options in a sleek, compact form factor, up to 34% smaller than previous Optoma models.<sup>1</sup>

An added benefit, the GT2000HDR features an external power supply offering more reliability, portability and energy efficiency.

## **Specifications**

EAN: 5055387666986, Colour: White

	/hite
UPC: 796435 44 657 4, Colour: V	
Display/image	
Display technology	DLPTM
Resolution	1080p Full HD (1920x1080)
Brightness	3,500 lumens
Contrast ratio	300,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction - horizontal	+/-30°
Keystone correction - vertical	. / 20%
	+/-30°
Displayable colours (millions)	1073.4
Horizontal scan rate	15 ~ 140Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	75%
Screen size	0.76m ~ 7.62m (30" ~ 300") diagonal
Lamp info	
Light source type	Laser
LASER life	30,000 hours
Optical	
Throw ratio	0.496:1
Projection distance (m)	0.3m - 3.3m
Zoom type	Fixed
Focal length (mm)	7.51
Native offset	116%
	11070
Connectivity	
Connections	Inputs 2 × HDMI 2.0
	<b>Outputs</b> 1 x Audio 3.5mm, 1 x USB-A power 1.5A
	Control 1 x RS232
General	
Noise level (typical)	32dB
Noise level (max)	34dB
PC compatibility	FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
2D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,
2D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)
2D compatibility 3D compatibility	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4.43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)
2D compatibility 3D compatibility 3D	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready
2D compatibility 3D compatibility 3D Security	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface
2D compatibility 3D compatibility 3D Security P rating	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/O/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface IP6X
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> </ul>
2D compatibility 3D 3D Security P rating DSD / display languages	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional),</li> </ul>
2D compatibility 3D compatibility 3D Security P rating OSD / display languages 24/7 operation	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> </ul>
2D compatibility 3D compatibility 3D Security P rating OSD / display languages 24/7 operation 360° operation	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating DSD / display languages 24/7 operation 360° operation Operating conditions	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> </ul>
2D compatibility 3D compatibility 3D Security P rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>0°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating DSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>O°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indionesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> <li>Card style</li> <li>1</li> <li>15W</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes<!--</th--></li></ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indionesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> <li>Card style</li> <li>1</li> <li>15W</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> <li>Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz</li> <li>SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,</li> <li>720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D)</li> <li>3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>0°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> <li>Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> </ul>
2D compatibility 3D Security P rating DSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker n the box	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norweigian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> <li>8.60ms</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m</li> <li>Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/O/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface IP6X 25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese Yes Yes Yes 0°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style 1 15W AC power cord Remote control 2x AAA batteries Basic user manual 8.60ms UHDCast Pro
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker in the box Input lag Optional wireless models Power Power supply	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface IP6X 25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese Yes Yes 0°C ~ 40°C, Max, Humidity 80%, Max. Altitude 2,500m Card style 1 15W AC power cord Remote control 2x AAA batteries Basic user manual 8.60ms UHDCast Pro
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power supply Power consumption (standby)	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface IP6X 25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese Yes Yes O°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style 1 15W AC power cord Remote control 2x AAA batteries Basic user manual 8.60ms UHDCast Pro
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power supply Power consumption (standby) Power consumption (min)	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> <li>8.60ms</li> <li>UHDCast Pro</li> <li>100V ~ 240V, 50-60Hz</li> <li>&lt;0.5W</li> <li>98W</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power consumption (standby) Power consumption (min) Power consumption (max)	NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480l/p, 576l/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready Security bar, Kensington Lock, Password protected interface IP6X 25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese Yes Yes O°C ~ 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style 1 15W AC power cord Remote control 2x AAA batteries Basic user manual 8.60ms UHDCast Pro
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power consumption (standby) Power consumption (min) Power consumption (max)	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> <li>8.60ms</li> <li>UHDCast Pro</li> <li>100V ~ 240V, 50-60Hz</li> <li>&lt;0.5W</li> <li>98W</li> </ul>
2D compatibility 3D compatibility 3D Security IP rating OSD / display languages 24/7 operation 360° operation Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power consumption (standby) Power consumption (min) Power consumption (max) Weight and dimensions	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080p(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> <li>8.60ms</li> <li>UHDCast Pro</li> <li>100V ~ 240V, 50-60Hz</li> <li>&lt;0.5W</li> <li>98W</li> </ul>
	<ul> <li>NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080(50/60Hz), 1080(50/60Hz)</li> <li>Yes (DLP 3D; PC frame sequential 120Hz 3D, Blu-ray DVD 3D) 3D ready</li> <li>Security bar, Kensington Lock, Password protected interface IP6X</li> <li>25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norweigian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese</li> <li>Yes</li> <li>Yes</li> <li>O°C - 40°C, Max. Humidity 80%, Max. Altitude 2,500m Card style</li> <li>1</li> <li>15W</li> <li>AC power cord</li> <li>Remote control</li> <li>2x AAA batteries</li> <li>Basic user manual</li> <li>8.60ms</li> <li>UHDCast Pro</li> <li>100V ~ 240V, 50-60Hz</li> <li>&lt;.5W</li> <li>38W</li> <li>139W</li> </ul>





Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. <sup>1</sup> Based on the comparison of the 2023 Optoma mainstream laser projectors and its previous generation. <sup>2</sup> Comparison of 2023 Optoma mainstream laser projectors. 12052023023742